

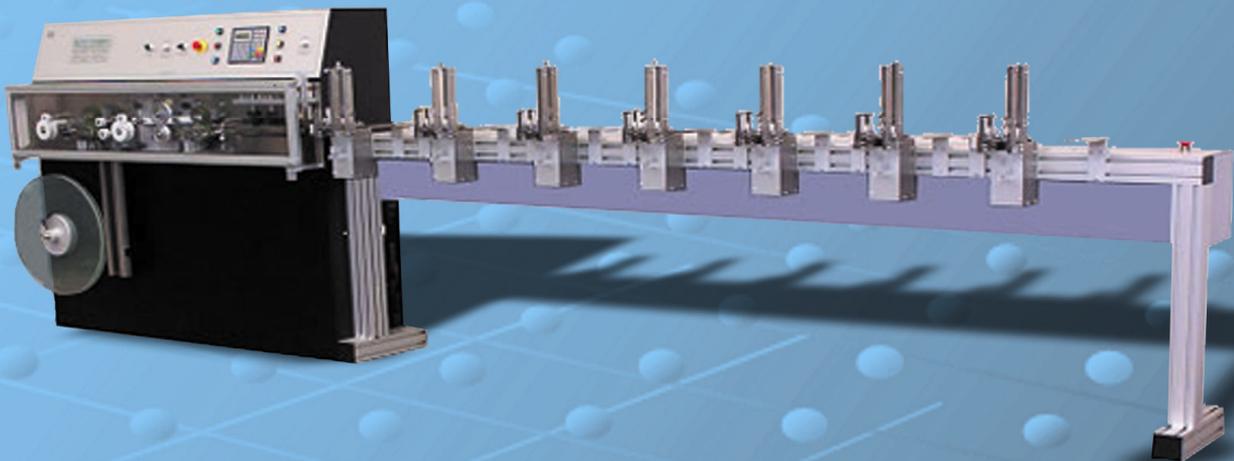


MACHINE FOR VENETIAN BLINDS



TV 6000 PP

TV 6000/P.P. is the latest model among the venetian blind machines projected by Tecno System. This machine forms, punches, cuts and threads 12,5mm - 15/16mm - 25mm /35mm - 50mm slats. The machine is equipped with 1 punch operated by brushless motor. This system allows a remarkable slat speed together with a very compact and space saving frame. The machine is equipped with a unique software (with a maximum of 89 programmes that can be memorized) and allows the production of three different blinds configuration such as "standard", "motorized" and "monocomando". The machine also includes a "manual program" for the production of blinds that differs from standard parameters.



SOME IMPORTANT FEATURES ARE:

- A special program to manufacture blinds with asymmetric holes, for triangular trapezoid, rectangular, circle and arch shaped blinds.
- A guide hole punch is available on request.
- The number of threading stations is determined by the length and type of blind. An additional optical reference and centring pins on top of threading stations guarantee their correct positioning.
- Each threading station is equipped with a special and patent pending device that by means of pneumatic cylinders and ball bearing driving wheels help the slat to thread even at high speed.
- Very fast kit change: from 15mm to 25mm it only takes 5 minutes.
- Electromagnetic braking system on coil holder to avoid coil unwinding.
- One magazine for coil accumulation with optical sensors to guarantee homogeneous forming of slat from the beginning to the end of the coil. This will keep the slat constantly tightened and will prevent the slat from deforming due to possible abrupt pulls
- Variable slat pulling speed.
- Automatic machine shut-off in case of splices in coil and/or end of the coil.
- The machine automatically stops should the slat accidentally jams in the ladder tape.
- Double emergency device.
- **The machine can be supplied as follows:**
12,5mm 15/16mm 15/16mm 25mm
25mm 35mm 25mm 50mm 35mm 50mm
- Production capacity:
 25mm slat = 1 square meter/minute
 16mm slat = 1 square meter/2 minutes
- All electric, electronic and pneumatic parts are guaranteed to UNI Europeans standards
- TV 6000/P.P has been designed and built according to the EC rules.



DIMENSIONS AND WEIGHTS

Length	4900 mm
Height	1600 mm
Width	600 mm
Weight	350 Kg

TECNICAL FEATURES

Electric supply	220 V 50/60 Hz Mono phase
Average electric consumption	1 Kw/h
Air supply	6 bar
Average air consumption	60 lt/min