



HEAT WELDING MACHINE FOR PVC CRISTAL, AWNINGS AND TENSION STRUCTURES

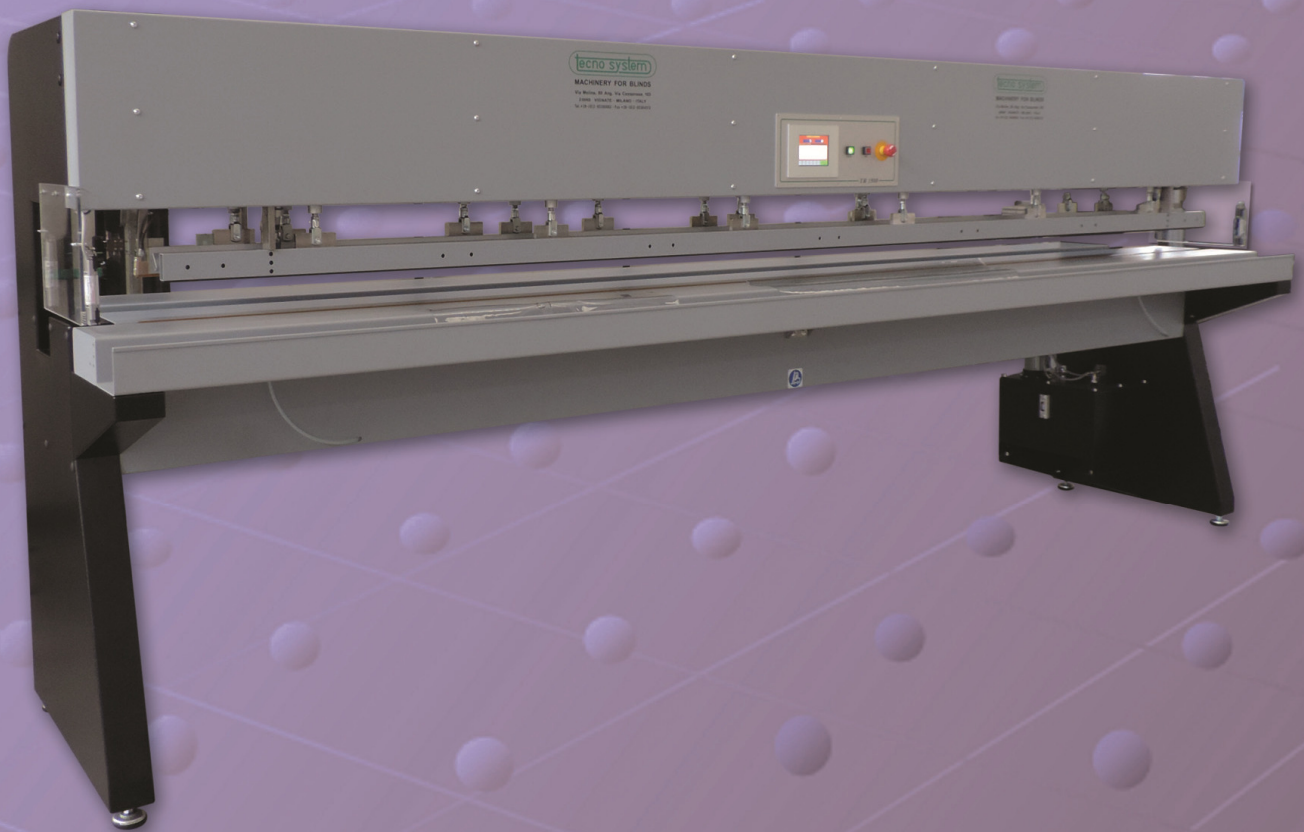

TR 1500 Cristal

La The new TR1500 is able to obtain a welding practically invisible and totally indestructible. The welding technology applied to the new TR1500 allows to produce machines with working width up to 5 meters at extremely low costs. The seal obtained, does not cause any alteration to the thickness and elasticity of the material on the treated area.

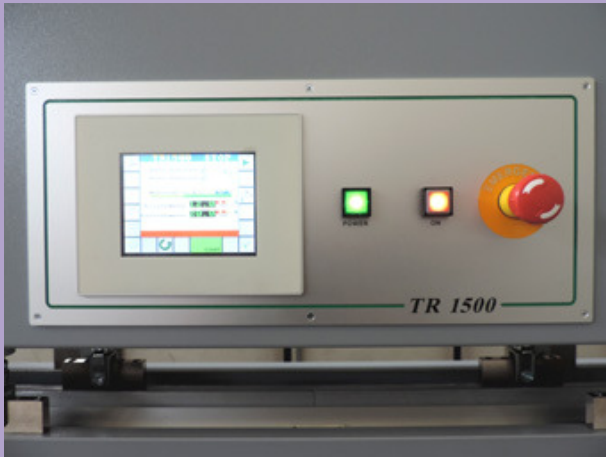

SOME IMPORTANT FEATURES ARE:

- Control panel with integrated computer controlled touch screen, for the management of all the functions of the machine. With the possibility to store different kinds of materials, and assign to each of them the appropriate welding setting.
- Function controls with related fault messages with text messages on the display.
- Processing cycle operated by a button on display and footswitch to work on the rear side of the machine.
- Emergency button
- The movement of the devices is pneumatic
- Cooling of the sealing bars, through refrigerant liquid at closed loop.
- Canals housing of the sheets to be welded from both sides of the machine.
- The **TR 1500 Cristal** is designed and built in according to CE standards.
- On request, the **TR 1500 Cristal** can be equipped with different welding sections: **5mm 10mm and 20mm.**
- The **TR1500 Cristal** is produced with useful welding widths of 3 - 4 & 5 meters.
- All mechanic, electronic and pneumatic parts are guaranteed by UNI norms
- Machine **TR1500 Cristal** has been built and designed according to CE norms

DIMENSIONS AND WEIGHT

- Width version 3mt 3350 mm Weight 650 Kg
- Width version 4mt 4350 mm Weight 750 Kg
- Width version 5mt 5350 mm Weight 850 Kg
- Height 1770 mm
- Length 1000 mm

TECHNICAL SPECIFICATIONS

- Electric supply 380V + Neutral +Ground 50/60 HZ
- Average electric consumption: 4 KVA
- Air supply : 6 BAR
- Average air consumption: about 10 lt/min